

LETTER OF TRANSMITTAL

TO:

Main Street Builders
Robert Roberts, LLC
L Squared Construction
Modus Build, LLC
Eastern Companies

Dakota Wilson dakota@mainstreet.builders
Blake Goldsmith estimating@robertroberts.com
Miles Knox miles@lsquared.build
Zach Pappas zpappas@modusbuildllc.com
Edward Shin eshin@buildwitheastern.com

City of Fort Oglethorpe

Kathy Bradley kbradley@fortoglethorpega.gov

Garbee Architecture
March Adams

Phil Minton pminton@fortoglethorpega.gov
Edmund Garbee ed@garbeearchitecture.com
Jeff Westbrook jeff.westbrook@marchadams.com

The Blue Book
Dodge Data & Analytics
Associated General Contractors
Builders Exchange of Tennessee
Construct Connect

Erin McVeigh emcveigh@mail.thebluebook.com
dodge.bidding@construction.com
planroom@agcetn.org
Heather Lowery heather@bxtn.org
Gwen Perew gwen.perew@constructconnect.com

FROM: Philip Schofield, P.E., Senior Project Manager

DATE: July 24, 2026

PROJ. NO.: G25003-01
SUBJECT: Addendum No. 1
Courts Renovation
City of Fort Oglethorpe, Georgia

PAGES: 19 pages follow

**PLEASE
RESPOND**



**TO CONFIRM RECEIPT OF THIS ADDENDUM NO. 1
PLEASE SIGN AND EMAIL TO CTI**

vvisco@ctiengr.com

Company _____

Signature _____

Title _____

Date _____

ADDENDUM NO. 1
COURTS RENOVATION
CITY OF FORT OGLETHORPE, GEORGIA
CTI PROJECT NO. G25003-01

I. CLARIFICATIONS

1. **Will there be any days when we are not able to work? (i.e. court session days) When is this?**

Response: No. Construction will be allowed during court session days.

2. **Could you provide an allowance for flooring / painting / solid surface that the contractors can use for this bid?**

Response: The Bid Schedule has been revised to include Owner Material Allowance items for Luxury Vinyl Tile (LVT), Carpet Tile, Paint, and Solid Surface Countertop materials. These allowances are excluded from the Base Bid. The Owner will reimburse the Contractor for the actual invoiced cost of Owner-selected materials from the applicable allowance upon submission of supplier invoices with each monthly Application for Payment. Any unused allowance balance shall remain with the Owner. Material costs exceeding the stated allowance amount shall require Owner approval and shall be addressed by Change Order.

3. **Would the Owner like to include a unit price rate to patch existing EIFs outside of our scope.**

Response:

- a) Minimum repair area to be 4 square feet.
- b) Unit Price #1: Remove and replace EIFS finish assembly, excluding sheathing replacement per sf.
- c) Unit Price #2: Replace deteriorated exterior gypsum sheathing per square foot.
- d) Unit Price #3: Replace damaged stud framing per lineal foot.

4. **There was mention of a phasing schedule for this project, could you provide time frames/ phasing plan for this scope.**

Response: There is no phasing to project schedule. The awarded contractor will need to work with the owner when relocating the existing bulletproof windows so as not to disrupt the court schedule.

5. **Is this project Davis Bacon or Buy America?**

Response: The project does not fall under either of these requirements.

6. **Plans show conflict between pendant and concealed sprinkler heads. Please advise the correct sprinkler heads to install.**

Response: Existing sprinkler heads are pendant. New heads to be installed as concealed per detail sheet FP0.1.

7. **Contractor Staging area, Dumpster and Parking Response:**

- a) See attached site plan from CTI Engineers.
- b) Damage to the existing parking, landscaping, sidewalks due to construction dumpster location/operation shall be repaired to match existing parking, landscaping, and sidewalks.

II. DRAWINGS

1. ADD Sheet SK-1 Courts Door Schedule (Attached)

Door Size Changes

- a) Door 150x to become 6'-0" x 7'-0"
- b) Door 150y to become 6'-0" x 7'-0"

III. CONTRACT DOCUMENTS

1. **Section 00 42 00, Bid Schedule**

- a) DELETE Pages 00 42 00-01 thru 00 42 00-03 and SUBSTITUTE the attached Pages 00 42 00-01.1 thru 00 42 00-04.1

IV. SPECIFICATIONS

1. **Section 09 65 19, Resilient Tile Flooring**

- a) ADD Page 09 65 19-01

2. **Section 12 36 61, Solid Surface Countertops**

- a) ADD Page 12 36 61-01

3. **Section 13 47 13, UL 752 – Level 3 Bullet-Resistant Fiberglass Panels**


- a) ADD Pages 12 36 61-01 thru 13 47 13-03

Date: July 24, 2026

CITY OF FORT OGLETHORPE, GEORGIA
/s/ Molly Huhn, City Manager

NOTES:

1. PARKING AND STAGING AREA SHALL BE KEPT NEAT AND ORDERLY AT ALL TIMES. ALL STAGED MATERIAL SHALL BE KEPT IN AN ORDERLY FASHION.
2. PARKING ACCESS SHALL REMAIN ACCESSIBLE AT ALL TIMES, DRIVE LANES SHALL NOT BE BLOCKED FOR ANY SUBSTANTIAL AMOUNT OF TIME.
3. FENCING IS NOT TO BE ERECTED.
4. DAMAGE TO THE EXISTING PARKING, LANDSCAPING, SIDEWALKS DUE TO CONSTRUCTION DUMPSTER LOCATION/OPERATION SHALL BE REPAIRED TO MATCH EXISTING PARKING, LANDSCAPING, AND SIDEWALKS.

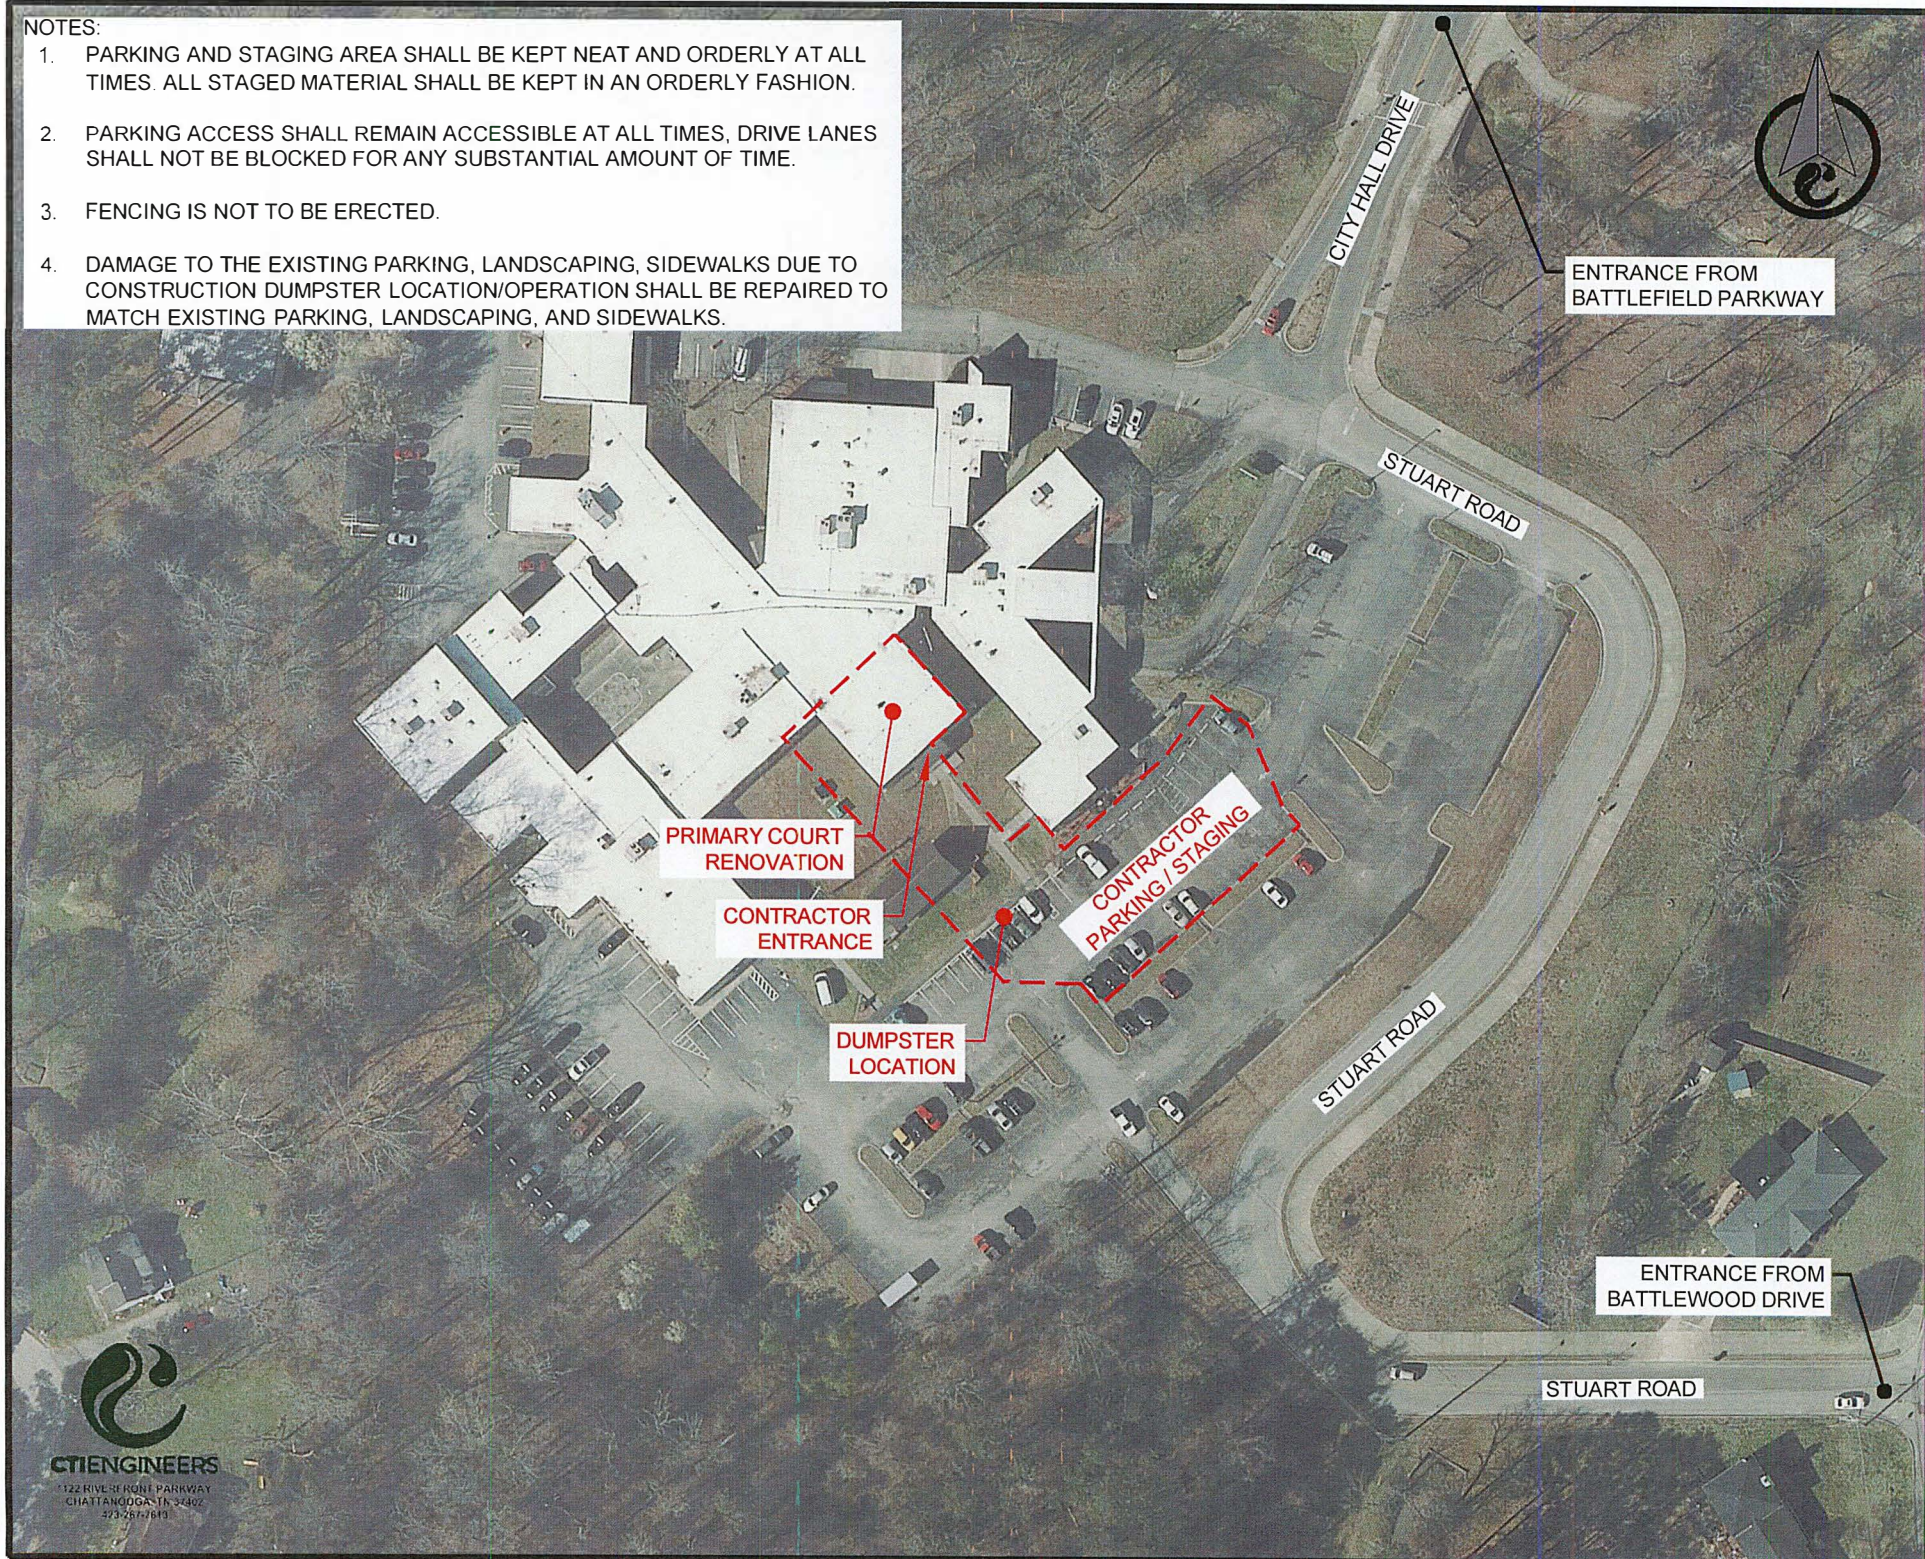



Edmund Garbee Architect

633 Chestnut Street, Suite 600, Chattanooga, TN 37450 Ph: (423) 364-2830 email:ed@garbeearchitecture.com

Memorandum

Fort Oglethorpe Courts Renovation

Date: July 14, 2026

To: Valerie Visco

From: Ed Garbee

Of: CTI Engineers

Pages: 2

Fax: -

Via: -

Re: Door Sizes and ADA

CC: -

Doors 105x and 150y are being changed to be 72" x 84" openings. Please see attached SK-1 sheet.

Courts Door Schedule

Mark	Type Mark	Width	Height	Thickness	Hardware Schedule	Head Detail	Jamb Detail	Sill Detail	Comments
150A	D19	7' - 0"	7' - 0"	1 3/4"	6				Existing Door
150B	EX	3' - 0"	7' - 0"	1 3/4"	EX				Existing Door
150C	EX	3' - 0"	7' - 0"	1 3/4"	EX				Existing Door
150X	D22	6' - 0"	7' - 0"	1 3/4"	7	1	2		
150Y	D2	6' - 0"	7' - 0"	1 3/4"	5	5	6	5	
151X	EX	3' - 0"	7' - 0"	1 3/4"	EX				Existing Door
152X	EX	3' - 0"	7' - 0"	1 3/4"	EX				Existing Door
156X	D4	3' - 0"	7' - 0"	1 1/2"	9	3	4		
156Y	D4	3' - 0"	7' - 0"	1 1/2"	9	3	4		
168X	EX	3' - 8"	7' - 0"	1 3/4"	8				Existing Door
171X	D5	3' - 0"	7' - 0"	1 3/4"	3	1	2		
172X	D1	3' - 0"	7' - 0"	1 3/4"	3	1	2		
173X	D3	5' - 8"	7' - 0"	1 3/4"	7	1	2		
173Y	D1	3' - 0"	7' - 0"	1 3/4"	8	1	2		
173Z	EX	3' - 0"	7' - 0"	1 3/4"	Panic Hardware				Existing Door
174X	D1	3' - 0"	7' - 0"	1 3/4"	3	1	2		
174Y	D1	3' - 0"	7' - 0"	1 3/4"	10	1	2		
175X	D1	3' - 0"	7' - 0"	1 3/4"	4	1	2		
176X	D1	3' - 0"	7' - 0"	1 3/4"	4	1	2		
177X	D1	3' - 0"	7' - 0"	1 3/4"	4	1	2		
178X	EX	3' - 8"	7' - 0"	1 3/4"	1				Existing Door
179X	EX	2' - 8"	7' - 0"	1 3/4"	EX				Existing Door
181X	EX	7' - 0"	7' - 0"	1 3/4"	6				Existing Door

Reference Sheet: A-4.1

(c)2026



633 Chestnut Street, Suite 600
Chattanooga, TN 37450
p. 423.364.2830

Courts Renovation

07/14/26
25-001

SK-1

BID SCHEDULE FOR LUMP SUM

Project: **Courts Renovation**

Project No: **ITB #001-26**

This Bid is submitted to: City of Fort Oglethorpe
500 City Hall Drive
Fort Oglethorpe, GA 37042

1. The undersigned bidder proposes and agrees, if this bid is accepted, to enter an agreement with Owner in the form indicated in the Contract Documents for the contract price within the contract time indicated in this bid.
2. Bidder has carefully examined the plans, the technical specifications, the General Conditions, the Supplementary Conditions, Instructions for Bidders, the form of the contract, the form of bonds, and all other contract documents, and thoroughly understands their stipulations, requirements, and provisions.
3. Bidder has examined the site and locality where the work is to be performed, the legal requirements (federal, state and local laws, ordinances, rules and regulations) and all conditions affecting cost, progress, or performance of the work. Bidder has made such independent investigations as bidder deems necessary to become thoroughly familiar with the conditions under which the work will be performed.
4. Bidder understands that a price for each item on the bid schedule must be filled in as stated in Instructions for Bidders. Failure to indicate price for alternates, if any, may be grounds for considering the bid irregular. Lump Sum prices on the bid schedule shall include all labor, materials, safety measures, overhead, profit, insurance, etc. to cover the finished work.
5. Bidder agrees that, if awarded the contract, all work thereunder shall be conducted in such a manner and with sufficient materials, labor, tools, equipment, apparatus, and incidentals as is necessary to insure satisfactory completion of the project within 210 calendar days from the date stipulated in the Notice to Proceed.
6. Bidder accepts the provisions of the Agreement as to liquidated damages of \$500 per day in the event of failure to complete the work on time.
7. Bidder represents that this bid is genuine and not made in the interest of or on behalf of any undisclosed person, firm or corporation.
8. Bidder understands that the Owner reserves the right to reject any or all bids and to waive any informalities in the bidding.
9. Bidder will complete the work as described in the specifications for the price(s) as shown on the following bid schedules.
10. The Bidder is hereby acknowledging that the following documents are attached to and made a condition of this Bid:
 - a) Required Bid Security in the form of: _____ Bid Bond.
 - b) Required Drug-Free Workplace Affidavit
 - c) Required Bidder's Statement of Qualifications.
 - d) Required Bidder's Statement of Equipment.
 - e) Acknowledgment of Addenda #'s _____, _____.

**BID SCHEDULE
COURTS RENOVATION
CITY OF FORT OGLETHORPE, GEORGIA
PROJECT NO. G25003-01**

SCHEDULE I - LUMP SUM

Item No. 1

The Lump Sum Bid for furnishing and installing all materials, equipment, labor, and services identified in these Specifications for the construction of the renovation of the Municipal Court facilities, complete as shown on the Drawings and specified in the Contract Documents, including selective demolition, interior renovations, courtroom improvements, accessibility upgrades, modifications to existing building systems, and related appurtenant work. (excluding items listed under Schedule II)

_____ Dollars and
(In words)
_____ Cents

Total Lump Sum of: \$ _____
(In figures)

SCHEDULE II – OWNER ALLOWANCE ITEMS

Item No.	Description	Allowance Amount
A-1	Allowance – Luxury Vinyl Tile (LVT) (Material Only)	\$13,000
A-2	Allowance – Carpet Tile Material Only	\$24,000
A-3	Allowance – Solid Surface Countertop Material Only	\$2,000
A-4	Allowance – Coating and Related Materials: primer, finish paint, tinting, and manufacturer –recommended sundries directly associated with the coating system (Material Only)	\$8,000

Owner Material Allowances: The allowance items shown are not included in the Base Bid and will be funded separately by the Owner. The allowances are established solely for the purchase of finish materials selected by the Owner. As materials are furnished, the Contractor shall submit copies of supplier invoices with each monthly Application for Payment, and the Owner will reimburse the actual invoiced material cost from the applicable allowance. Any unused allowance balance shall remain with the Owner. Costs exceeding the stated allowance amount shall require Owner approval and shall be addressed by Change Order.

Notes:

1) Amounts are to be shown in both words and figures. In case of a discrepancy, amount shown in words will govern

2) Contract will be awarded (if it is awarded) to the responsible and responsive bidder submitting the lowest bid at the sole discretion of the Owner.

BIDDER

DATE

BY

TITLE

ADDRESS

CITY

ZIP CODE

TELEPHONE NUMBER

FAX

E-MAIL

If BIDDER is:

An Individual

By _____ (SEAL)

(Individual's Name)

doing business as _____

Business Address: _____

Phone No.: _____ Business License No.: _____

A Partnership

By _____ (SEAL)

(Firm Name)

(general partner)

Business Address: _____

Phone No.: _____ Business License No.: _____

A Corporation

By _____

(Corporation Name)

(state of incorporation)

By _____

(name of person authorized to sign)

Business Address: _____

Phone No.: _____ Business License No.: _____

A Joint Venture

By _____

(Name)

(Address)

By _____

(Name)

(Address)

Phone No.: _____ Business License No.: _____

(Each joint venturer must sign. The manner of signing for each individual, partnership and corporation that is a party to the joint venture should be in the manner indicated above.)

SECTION 09 65 19

RESILIENT TILE FLOORING

Flooring Material

Luxury Vinyl Tile (LVT) Specifications

- Commercial Grade: Heavy commercial (ASTM F1700 Class III or equivalent)
- Wear Layer: 20 mil minimum
 - 20 mil is the industry standard for most offices.
- Overall Thickness: 4.5–5.0 mm minimum
- Installation: Full-spread adhesive unless a floating system is specifically desired.
- Finish: UV-cured polyurethane with ceramic bead or equivalent scratch-resistant coating.
- Slip Resistance: Meet ANSI A326.3 requirements.
- Fire Performance: ASTM E648 Class I and ASTM E662 as required by code.
- Warranty: Minimum 15-year commercial warranty (20 years preferred).
- Shaw Contract
- Contractor to provide samples for owner selection

Carpet Tile Specifications Standard Professional Office

- Construction: 18" × 18" carpet tile tufted textured loop
- Fiber: 100% solution-dyed nylon Type 6
- Face Weight: 20 oz./SY
- Backing: PVC-free heavy commercial backing
- Lifetime commercial warranty
- Installation: Manufacturer's recommended adhesive
- Contractor to provide samples for owner selection

Porcelain Tile Specifications High Traffic Public Space

- Tile Material:
 - 24" × 24" x 3/8" thick rectified porcelain tile complying with ANSI

A137.1

- Finish: Matte finish, through-body color
- Performance:
 - Water Absorption 0.5%,
 - Abrasion Resistance PEI: Class V
 - Minimum DCOF: ≥ 0.42
- ANSI A137.1 compliant
- ANSI A118.15 premium thin-set mortar
- ANSI A118.7 grout (or epoxy grout at entry vestibules and other areas subject to heavy moisture or staining)
- Contractor to provide samples for owner selection

SECTION 12 36 62

SOLID SURFACE COUNTERTOPS

Solid Surface Countertops

- 1/2-inch acrylic solid surface
- 1-1/2-inch built-up eased edge
- 4-inch backsplash
- Drop-in sink bowls as specified on plumbing drawings.
- ANSI/ICC 179.1 compliant
- Ten-year minimum manufacturer's warranty



Edmund Garbee Architect

633 Chestnut Street, Suite 600, Chattanooga, TN 37450 Ph: (423) 364-2830 email:ed@garbeearchitecture.com

Memorandum

Fort Oglethorpe Courts Renovation

Date: July 13, 2026

To: Philip Schofield

From: Ed Garbee

Of: CTI Engineers

Pages: Ed Garbee Architect

Fax: -

Via: [Click here and type method of transmittal]

Re: Robert Roberts RFI #1

CC: Valerie Visco

Please see attached documentation from the bullet resistance manufacturer used by the client.

The preferred material is a Level 3 panel by Armorcore.

Regarding ceiling and floor plans for the existing courts area shown in the demo plan, no plans have been created for this area. Work performed here is limited to demolition of indicated elements and patch and/or repair of adjacent finish so the existing space is not left in a state of exposed disrepair.

SECTION 13 47 13

UL 752 – LEVEL 3 BULLET-RESISTANT FIBERGLASS PANELS

PART 1 – GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions.

1.2 REFERENCES

- A. Underwriters Laboratories:
 - 1. UL 752 Specifications and Ammunition, 11th Edition, Standard for Bullet Resisting Equipment published September 9, 2005, revised December 21, 2006, Level 3.
- B. National Institute of Justice Ballistic Standards:
 - 1. NIJ Standard 0108.01 – Type III-A
- C. American Society for Testing and Materials:
 - 1. ASTM E119-98 Standard Test for One-Hour Fire-Rating of Building Construction and Materials
 - 2. ASTM F1233-98 Standard Test Method for Forced Entry Testing of Materials/Assemblies

1.3 SUBMITTALS

The following shall be submitted in accordance with Section 13 4713 and the SPECIAL CONTRACT REQUIREMENTS {Submit for approval prior to fabrication samples, brochures, specifications):

- A. UL LISTING Verification and UL752 Current Test Results as provided by Underwriters Laboratories.
- B. Printed data in sufficient detail to indicate compliance with the contract documents.
- C. ASTM E119-98 One-Hour Fire Rating of Building Construction and Materials.
- D. ASTM F1233-98 Standard Test Method for Forced Entry Testing of Materials/Assemblies.
- E. Manufacturer's Instructions for installation of Bullet Resistant Fiberglass Panels.

1.4 DESIGN

- A. Through the design, manufacturing technique and material application the Bullet Resistant Fiberglass shall be of the "non ricochet type." This design is intended to permit the encapture and retention of an attacking projectile lessening the potential of a random injury or lateral penetration.

1.5 DELIVERY, HANDLING, AND STORAGE

- A. Deliver the materials to the project with the manufacturer's UL LISTED Labels intact and legible.
- B. Handle the material with care to prevent damage. Store the materials inside under cover, stack flat and off the floor.

1.6 WARRANTY

- A. All materials and workmanship shall be warranted against defects for a period of two {2} years from the date of receipt at the project site.

PART 2 – PRODUCTS

2.1 MANUFACTURER

- A. Acceptable Manufacturers:
 - 1. Waco Composites, Ltd., Waco, TX 76710, fax: 254-752-3634, 254-752-3622 email: sales@armorcore.com.

2.2 MATERIAL

- A. The panels shall be made of multiple layers of woven roving ballistic grade fiberglass cloth impregnated with a thermoset polyester resin and compressed into flat rigid sheets. The production technique and materials used shall provide the controlled internal delamination to defeat the penetrating projectile.
- B. Bullet Resistant Fiberglass panels: 7/16" nominal thickness, and 4.8 lbs. per sq. ft. nominal weight.

2.3 SECURITY LEVEL

- A. The Bullet Resistant Fiberglass will be warranted to meet the requirements of UL752 Level 3.

PART 3 – EXECUTION

3.1 SUPPORTING MEMBERS

- A. Prior to installing the bullet resistive material the contractor shall verify that all supports have been installed as required by the contract documents and the architectural drawings.

3.2 JOINTS

- A. All joints shall be reinforced by a back-up layer of bullet resistive material. The bullet resistance of the joint, as reinforced, shall be at least equal to that of the panel. Minimum width of reinforcing layer at joint shall be 4-inches (2" on each panel or a 2" minimum overlap).

3.3 APPLICATION

- A. Armor shall be installed in accordance with the manufacturer's printed recommendations. Armor panels shall be adhered using an industrial adhesive, mastic, screws or bolts. Method of application shall maintain the bullet resistive rating at junctures with the concrete floor slab, the concrete roof slab, the bullet resistive door frames, the bullet resistive window frames, and all required penetrations.

Installation Instructions



Before Getting Started- Health & Safety Precautions:

ArmorCore® Bullet Resistant Panels are classified as Laminated FRP (Fiber Reinforced Plastic) products. It is important for installers of Fiberglass products to be properly supplied with the basic health and safety information and personal protective equipment, such as:

1. **MSDS** for **ArmorCore ©** products
2. **Gloves**- cotton or leather gloves to provide protection from cuts and abrasions associated with handling, drilling or cutting fiberglass materials. Nitrile/Latex gloves can also be used to prevent skin irritation due to fiberglass, but provide little cut or abrasion protection. Cotton gloves should have PVC black dots to provide adhesion (grip) to the panels.
3. **Dust/Particle masks or respirators** to provide respiratory protection against dust associated with cutting or drilling fiberglass materials. One product on the market is the Moldex 2300 Dust and Mist Respirator. Refer to OSHA regulation Part 29 CFR 1910.134 for proper fit and use of respirators.
4. **Protective Eyewear**, especially when cutting sanding or drilling fiberglass materials. Refer to OSHA regulation Part 29 CFR 1910.133 for proper selection and fit of safety glasses, goggles and face shields.
5. **Protective Wear** to be worn over clothing to provide protection from fibrous dust that can settle in the clothing or on the skin when cutting, sanding or drilling fiberglass materials. DuPont makes a protective wear material called Tyvek that is used in sleeves, shirts, bibs and full body suits available through different manufacturers. STOKO sells a barrier cream (STOKO Emulsion) that can be applied before working with fiberglass that can help prevent skin irritation. The above listed items should be worn if workers will be cutting, sanding or drilling.
6. **Ventilation** – Mechanical fans or dust collection equipment are useful in reducing dust irritation. If fans are used, always place the person between the fan and the panel being machined so that any dust produced will be forced away from personnel.





Introduction:


The following recommendations are designed to assist in the installation of ArmorCore® bullet resistant fiberglass panels, as well as to preserve the ballistic protection the panels are designed to provide. Different elements of working with the product are addressed, in addition to some tips to consider when ordering the product.

Panel Sizes and Cutting :

Waco Composites manufactures **ArmorCore®** panels in any combination of 3', 4' & 5' widths by 8', 9' & 10' lengths. Our sales team can optimize a cut list into the most efficient panels sizes for your project. Parts can be cut to any 2-dimensional size prior to shipping, using our CNC Water Jet Cutters. In the field, ArmorCore® panels can be cut with a diamond-grit blade. TSD 180D, manufactured by Tenryu, or a DiamondX Cutter are both quality 7" circular blades available through Waco Composites. For electrical boxes and other small openings, a diamond grit blade (available through most builder's supply in the ceramic tile section) on a reciprocating saw should be sufficient.





In addition to wearing protective clothing, a fan can be placed behind the cutting area to help blow away fiberglass particles.



Fastening and Drilling:

ArmorCore® panels may be attached using self-tapping drywall screws. When attaching a panel to a stud wall on which drywall will be the exterior surface, simply use enough screws to hold the panel to the studs, then come back with a complete screw pattern to the studs when hanging the drywall on top. If a different appliqué is to be used over the **ArmorCore®** panels and a flush surface is required, a counter-sink hole may be used before adding the screws. Panels up to 1-1/8" and thicker may require pre-drilling the fastener holes to prevent the screw heads from breaking, as well as to facilitate the installation. It is recommended that you use a carbide or cobalt tip drill bit at medium speed with medium pressure. Low carbon (high-speed steel) bits may be used, but will typically have a shorter lifespan.

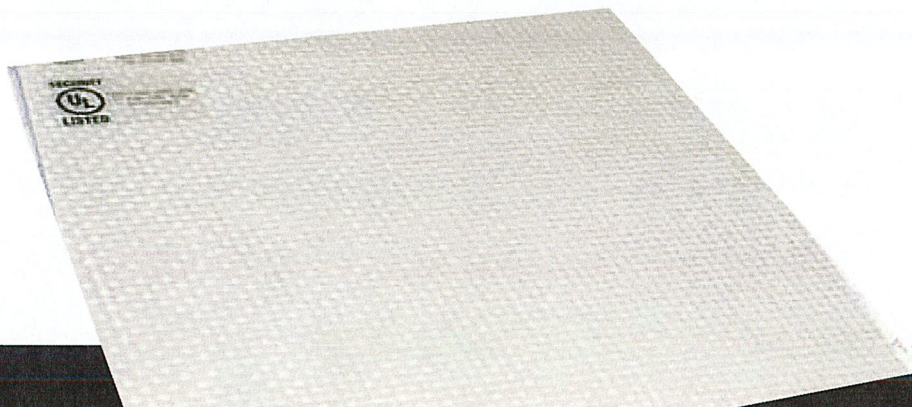



ArmorCore® panels can be used without treatment when placed with in a wall. If **ArmorCore®** panels will be a decorative surface, then the following methods can be used:

Peel Ply/ Cleaning/ Sanding:

A clean surface free of grit and oily residue is required prior to gluing or painting **ArmorCore®** panels. One method to achieve this finish is known as "peel ply." At the request of the customer at the time of order, a peel ply layer can be used in the manufacturing process. This thin extra layer is removed in the field immediately prior to working with the product. This leaves a clean, very slightly textured finish ready for treatment. Cleaning the panel can also be accomplished by wiping the surface with Acetone. Minimize the amount of time the panel is exposed to solvent, avoiding soaking. Sanding is another means of preparation. 120-grit sandpaper at medium pressure can be used to lightly "roughen-up" the surface.

Adhesives and Laminating:

ArmorCore® panels can also be attached with the use of adhesives. One product available is PL Premium Polyurethane Construction Adhesive. For stronger adhesion to non-porous substrates, such as aluminum, steel and stainless steel, or bonding one panel to another, a 2-part Methyl Methacrylate (MMA) adhesive may be utilized, such as Plexus MA 320. Laminates can be applied with standard contact adhesives and should be thick enough to avoid transfer of texture to the finished surface. Apply adhesive per manufacturer's instructions.



Painting:

Once **ArmorCore®** panels have been prepared with one of the above methods, they can be painted with either an oil or water-based paint. An automotive urethane works well as a "high-end" solution. For any external application that requires panels to be exposed to the elements, a paint with a UV inhibitor should be used to protect the product from long-term UV ray exposure.

Wall Assembly:

For typical wall and millwork installations, a 4" wide batten strip of the same level material should be specified at the butt-joints to provide a minimal 2" overlap from one panel to the next, or each side of the joint. Batten strips are available as separate items from Waco Composites, or can be cut in the field from raw panels.

The **ArmorCore**® batten strips can be attached directly to the panels and should be used where any vertical or horizontal joints occur. Battens are not required where a 90° corner occurs, in which case a panel should simply overlap to the next panel at the corner (*see diagram*).

By having the panel joints between the studs, the battens can be attached without pushing out the wall further. In the case of electrical cut-outs, an additional 12" high piece of the same level of **ArmorCore**® material may be installed from the stud-to-stud, as close as possible to the hole (*see diagram*).

Contact:




For mechanical properties or engineering questions, contact:

Warren Hampton: wchampton@armorcore.com

For all other questions, contact:

Warren Hampton: wchampton@armorcore.com

Melissa Jones: mjones@armorcore.com

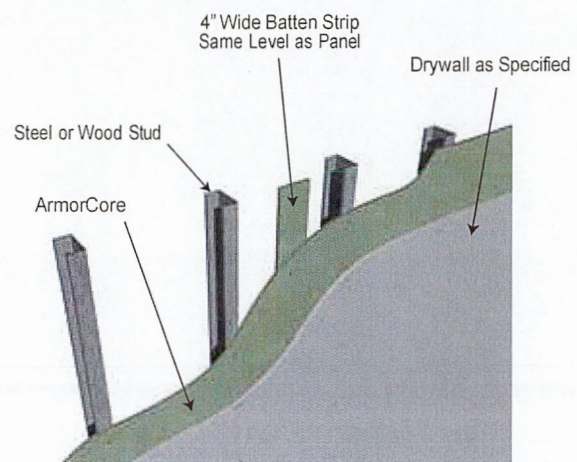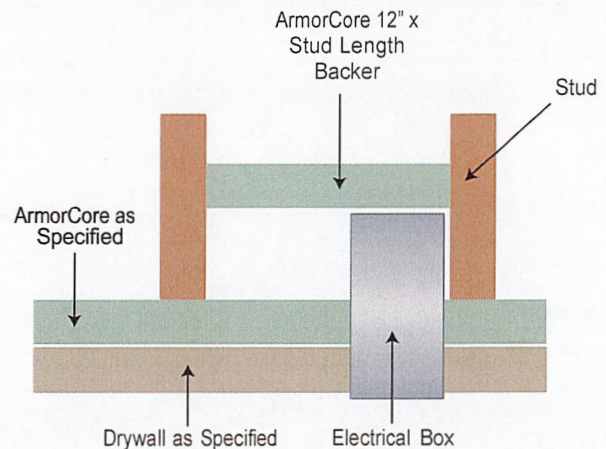

Call us at: 866-688-3088
Or visit our website: www.ArmorCore.com